


ISO STAINLESS STEEL TRAPPED CENTERING RING, VITON O'RING, ALUMINIUM OUTER

- \* MATERIAL: STAINLESS STEEL, ALUMINIUM & VITON
- \* BAKEABLE TO 200°C (SUSTAINED 150°C)
- \* VACUUM RATING  $1 \times 10^{-8}$  mbar

| ORDER CODE  | NW  | A  | B   | C   | D   |
|-------------|-----|----|-----|-----|-----|
| ISO63SVCRT  | 63  | 8  | 3.9 | 70  | 94  |
| ISO80SVCRT  | 80  | 8  | 3.9 | 83  | 109 |
| ISO100SVCRT | 100 | 8  | 3.9 | 102 | 128 |
| ISO160SVCRT | 160 | 8  | 3.9 | 153 | 179 |
| ISO200SVCRT | 200 | 8  | 3.9 | 213 | 239 |
| ISO250SVCRT | 250 | 8  | 3.9 | 261 | 287 |
| ISO320SVCRT | 320 | 14 | 5.6 | 318 | 358 |
| ISO400SVCRT | 400 | 14 | 5.6 | 400 | 440 |
| ISO500SVCRT | 500 | 14 | 5.6 | 501 | 541 |
| ISO630SVCRT | 630 | 14 | 5.6 | 651 | 691 |

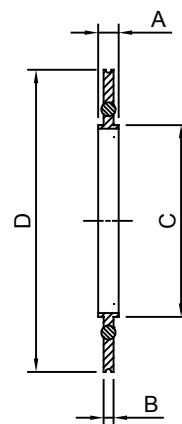

ISO ALUMINIUM TRAPPED CENTERING RING, VITON O'RING, ALUMINIUM OUTER

- \* MATERIAL: ALUMINIUM & VITON
- \* BAKEABLE TO 200°C (SUSTAINED 150°C)
- \* VACUUM RATING  $1 \times 10^{-8}$  mbar

| ORDER CODE  | NW  | A  | B   | C   | D   |
|-------------|-----|----|-----|-----|-----|
| ISO63AVCRT  | 63  | 8  | 3.9 | 70  | 94  |
| ISO80AVCRT  | 80  | 8  | 3.9 | 83  | 109 |
| ISO100AVCRT | 100 | 8  | 3.9 | 102 | 128 |
| ISO160AVCRT | 160 | 8  | 3.9 | 153 | 179 |
| ISO200AVCRT | 200 | 8  | 3.9 | 213 | 239 |
| ISO250AVCRT | 250 | 8  | 3.9 | 261 | 287 |
| ISO320AVCRT | 320 | 14 | 5.6 | 318 | 358 |
| ISO400AVCRT | 400 | 14 | 5.6 | 400 | 440 |
| ISO500AVCRT | 500 | 14 | 5.6 | 501 | 541 |
| ISO630AVCRT | 630 | 14 | 5.6 | 651 | 691 |

